








**Characteristics:**  
Carbide boring bar equipped with rhombic positive insert (angle 80°).  
Range starting at Ø4 mm and minimum bore diameter of 5 mm.


Axial 0°  
Radial -6°

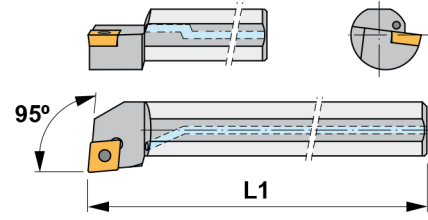


## E-SCLC 95°

Reference Referència	L1 Total length (mm) L1 Llargada total (mm)	Ø min. (mm)	Insert size Mida plaqueta	 Kg
E04G SCLCR 0305	90	5	CC.. 0301..	0,035
E05H SCLCR 0306	100	6	CC.. 0301..	0,040
E06J SCLCR 0307	110	7	CC.. 0301..	0,050
E07K SCLCR 0408	125	8	CC.. 0401..	0,070

Reference Referència			Nm
E04G SCLCR 0305	1415	5506	0.6
E05H SCLCR 0306	1415	5506	0.6
E06J SCLCR 0307	1415	5506	0.6
E07K SCLCR 0408	1420	5506	0.6

**CC..** 80° rhombic positive inserts with 7° clearance.  A30-31  
Plaquetes ròmbiques positives 80° amb 7° incidència.

Reference / Ref.	l	s	d
CC.. 0301..	3,60	1,39	3,50
CC.. 0401..	4,40	1,79	4,30



CCET

