




CN** holder (external) P-Clamping

PCLNR/L Kr: 95°



Right hand style

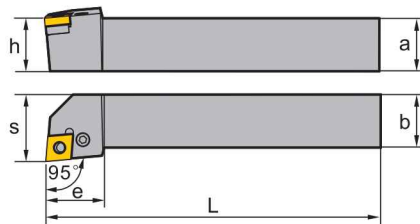

Article	*	Stock		Dimensions [mm]						Inserts
		R	L	a	b	L	h	s	e	
PCLNR/L1616H09	●	●		16	16	100	16	20	20	CN**0903**
PCLNR/L2020K09	●	●		20	20	125	20	25	22	CN**0903**
PCLNR/L2525M09	○	●		25	25	150	25	32	22	CN**0903**
PCLNR/L1616H12	○	○		16	16	100	16	20	20	CN**1204**
PCLNR/L2020K12	●	●		20	20	125	20	25	28	CN**1204**
PCLNR/L2525M12	●	●		25	25	150	25	32	28	CN**1204**
PCLNR/L3232P12	●	●		32	32	170	32	40	28	CN**1204**
PCLNR/L2525M16	●	●		25	25	150	25	32	33	CN**1606**
PCLNR/L3232P16	●	●		32	32	170	32	40	33	CN**1606**
PCLNR/L3232P19	●	●		32	32	170	32	40	38	CN**1906**
PCLNR/L4040S19	●	●		40	40	250	40	50	38	CN**1906**
PCLNR/L4040S2507	●	●		40	40	250	40	50	49	CN**2507**
PCLNR/L4040S2509	●	●		40	40	250	40	50	49	CN**2509**

● Ex stock ○ On demand

* With internal cooling

Spare parts

	Insert	CN**0903**	CN**1204**	CN**1606**	CN**1906**	CN**2507**	CN**2509**
		h	16-25	16-32	25-32	32-40	40
	Knee lever	L3	L4	L5	L6	L8	L8
	Screw		LEM8×21 (10.2 Nm)	LEM8×25 (10.2 Nm)	LEM10×27 (16.6 Nm)		
	Screw	LEM6×13.4A (7.0 Nm)				LEM12×36A (25.2 Nm)	LEM12×36A (25.2 Nm)
	Shim	C09AP	C12AP	C16AP	C19AP	C25AP-07	C25AP
	Shim pin (shim)	SP10	SP4	SP5	SP6	SP8	SP8
	Wrench	WH25L	WH30L	WH30L	WH40L	WH50L	WH50L

CN** holder (external)

Insert					
					
Wiper	Finishing	Medium Cut	Roughing	Cast Iron	PCBN/PCD
A51	A52	A53	A57	A61	A177

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index