



HSSE-PM-Hardlube Machinetap Metrisch, voor RVS
Voor blinde gaten

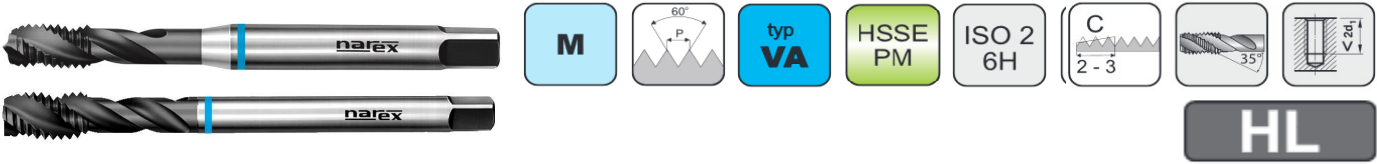

Afmetingen



Artikelnummer	d1	Spoed	l1	l2	d2	a	DIN	 Ø mm
2320M3	M3	0,5	56	5	3,5	2,7	371	2,5
2320M4	M4	0,7	63	7	4,5	3,4	371	3,3
2320M5	M5	0,8	70	8	6	4,9	371	4,2
2320M6	M6	1	80	10	6	4,9	371	5,0
2320M8	M8	1,25	90	13	8	6,2	371	6,8
2320M10	M10	1,5	100	15	10	8	371	8,5
4320M12	M12	1,75	110	18	9	7	376	10,2

Materiaal	Vc m/min	F = toerental x spoed
Staal		
Hoog gelegeerd staal 36CrNiMo4 42CrMo4	5-8m/min	
Roestvrijstaal		
RVS ferritisch / martenitisch 403-416 - 420	8-14m/min	
RVS Austenitisch 303-304-316	6-10m/min	